




Belfield software Ltd  
Technical notes  
USB GPS receiver **BU-353**  
Baud rate 4800




1. Insert the CD and it will auto run
2. Select: Install USB driver
3. This will open file explorer with options for either the XP, or, Vista driver, (use Vista for Windows 7) select as appropriate for your operating system

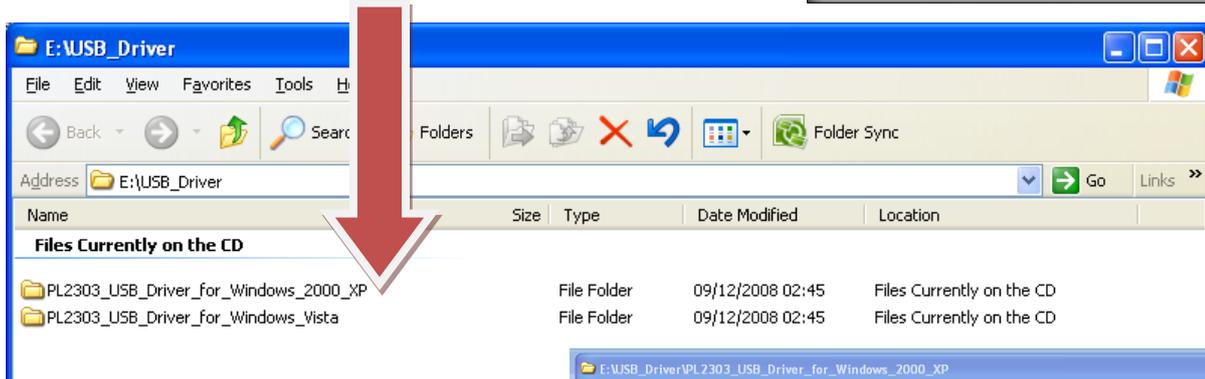


4. Click on set up to take you into the installation process
5. When the Finish option appears unplug the GPS (if plugged in) and re insert in order that the computer can detect the device.

A com port number has now been allocated for the GPS, this can be determined as follows:

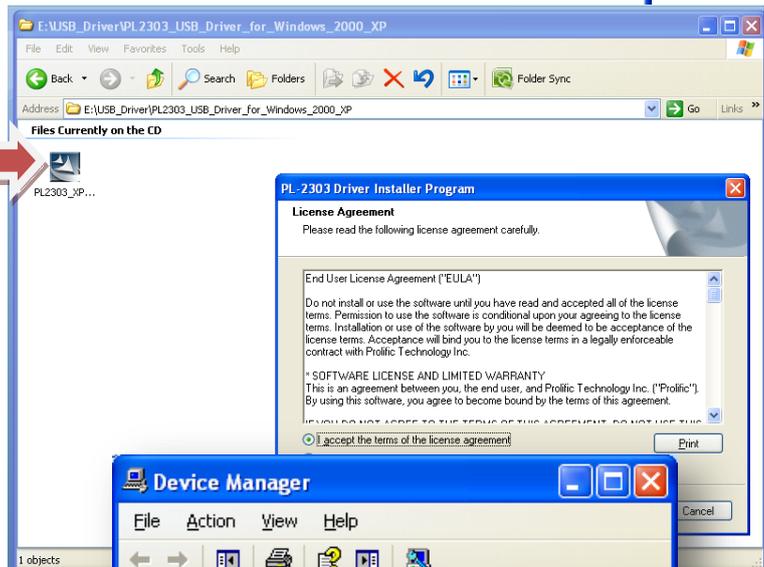

To establish the COM port number select:  
*Start > control panel > System > Hardware > Device Manager > Ports (Com & LPT)*

This sequence shows the Device Manager screen shown on the right. Open up the Ports list and the USB to serial Comm Port will be listed. In this example it is (Com8). Note the number as this is the Com port you will need to select when setting up the GPS in Chart Plotter. See Chart Plotter manual for setting up the GPS.

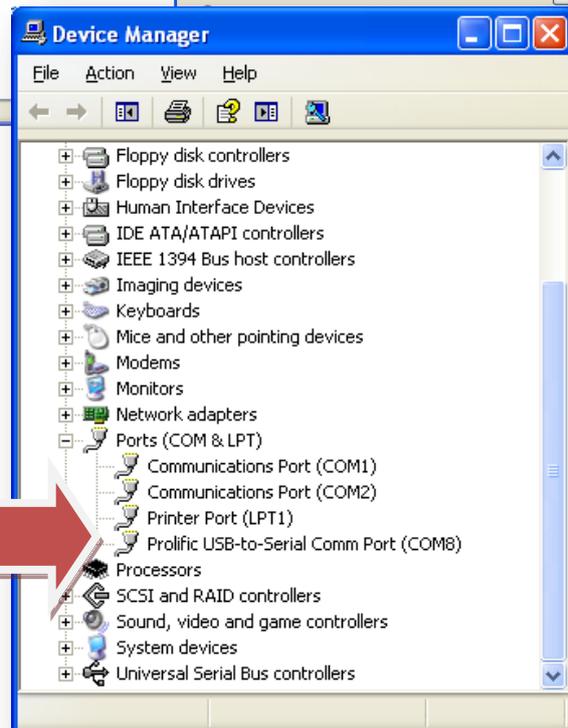

Within Chart Plotter click on file, instruments and select the baud rate at 4800 and the appropriate com port number. The drivers for this GPS are also available from: [www.chartsandtides.co.uk/support](http://www.chartsandtides.co.uk/support)